




## POWER ARM 30 SERIES

**PA3430** - 3.4m (11' 2") reach  
**PA3530 Skid Steer / Utility Loader Series** - 3.7m (12' 2") reach  
**PA4330** - 4.3m (14' 1") reach

| 30 SERIES  |                          |                          |                          |
|--|--------------------------|--------------------------|--------------------------|
| Advanced Controls                                  | PA3430                   | PA3530                   | PA4330                   |
| Cable Control                                      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Motion Mini  | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Motion   | —                        | —                        | —                        |
| Evolution  | —                        | —                        | —                        |
| Revolution Including Easy Drive System (EDS)       | —                        | —                        | —                        |
| Two-way Rotor Engagement - Cable Control (CRC)     | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Two-way Rotor Engagement - Electric Control (ERC)* | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Mounting   |                          |                          |                          |
| Front 3-Point Mounting Including Stabiliser        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Front DIN Plate Mounting                           | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Rear 3-Point Mounting Including Stabiliser         | <input type="checkbox"/> | —                        | <input type="checkbox"/> |
| Rear 3-Point to 4-Point Hitch Stabiliser Kit       | —                        | —                        | —                        |
| Rear 3-Point to 5-Point Axle Mounting Kit**        | —                        | —                        | —                        |
| Rear 5-Point Rigid Frame, Axle Mounting Kit**      | —                        | —                        | —                        |
| Armsets  |                          |                          |                          |
| Straight Armset                                    | ■                        | ■                        | ■                        |
| Midcut Armset                                      | —                        | —                        | —                        |
| Telescopic Armset                                  | —                        | —                        | —                        |
| Variable Forward Reach Armset (VFR)                | —                        | —                        | —                        |
| Telescopic-Variable Forward Reach Armset (T-VFR)   | —                        | —                        | —                        |
| Parallel Arm Geometry                              | ■                        | ■                        | ■                        |
| Hydraulics   |                          |                          |                          |
| Horsepower   | 30hp                     | 30hp                     | 30hp                     |
| System Type  | Gear                     | Gear                     | Gear                     |
| Pump Type  | Aluminum                 | Aluminum                 | Aluminum                 |
| Total Flow Rate l/min                              | 55.0                     | 55.0                     | 55.0                     |
| Arm Circuit Flow Rate l/min                        | 9.0                      | 9.0                      | 9.0                      |
| Attachment Circuit Flow Rate l/min                 | 46.0                     | 46.0                     | 46.0                     |
| Oil Tank Capacity                                  | 80ltrs                   | 55ltrs                   | 80ltrs                   |
| Oil Cooler   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Totally Independent Hydraulic System               | ■                        | ■                        | ■                        |
| Hydraulic Upgrades                                 |                          |                          |                          |
| Angle Float Kit                                    | ■                        | ■                        | ■                        |
| Lift Float Kit                                     | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Advanced Float Kit (only on EVOLUTION controls)    | —                        | —                        | —                        |
| EDS (only on REVOLUTION controls)                  | —                        | —                        | —                        |
| PowerBoost (75 l/min Arm Circuit Flow Rate)        | —                        | —                        | —                        |
| Additional Hydraulic Services                      | —                        | —                        | —                        |
| Safety Equipment                                   |                          |                          |                          |
| External Debris Blower                             | —                        | —                        | —                        |
| Integrated Debris Blower                           | —                        | —                        | —                        |
| Road Lighting Kit                                  | —                        | —                        | —                        |
| Warning Arrow Kit                                  | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Window Guards                                      | ■                        | ■                        | ■                        |
| Cab Protection Kit                                 | —                        | —                        | —                        |
| Safety Breakaway                                   | ■                        | ■                        | ■                        |
| Power Slew   | —                        | —                        | —                        |
| Cushioned Top Link                                 | —                        | —                        | —                        |
| Tractor Requirements                               |                          |                          |                          |
| Minimum Tractor Weight                             | 1,300kg                  | 1,300kg                  | 2,000kg                  |
| Minimum Tractor Horsepower                         | 35hp                     | 35hp                     | 55hp                     |
| Specification                                      |                          |                          |                          |
| Machine Weight #                                   | 400kg                    | 400kg                    | 523kg                    |
| Left and Right-Hand Build Options                  | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

\* Including SoftStart \*\* Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

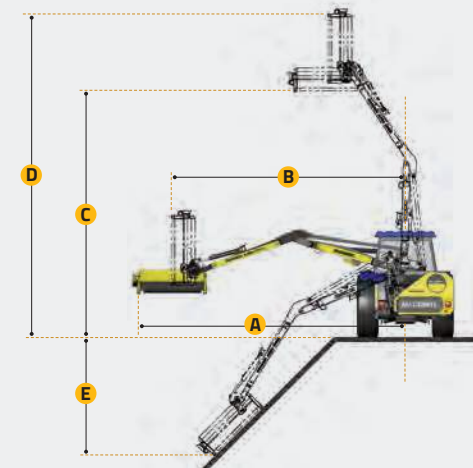

### REACH DIMENSIONS

|   | PA3430        | PA3530         | PA4330        |
|---|---------------|----------------|---------------|
| A | 3.4m / 11' 2" | 3.7m / 12' 2"  | 4.3m / 14' 1" |
| B | 2.9m / 9' 6"  | 3.2m / 10' 6"  | 3.8m / 12' 6" |
| C | 2.6m / 8' 6"  | 2.7m / 8' 10"  | 3.0m / 9' 10" |
| D | 3.8m / 12' 6" | 3.9m / 12' 10" | 4.2m / 13' 9" |
| E | 1.4m / 4' 7"  | 1.4m / 4' 7"   | 1.8m / 5' 11" |

### POWER ARM FLAILHEADS

|                               | PA3430                   | PA3530                   | PA4330                   |
|-------------------------------|--------------------------|--------------------------|--------------------------|
| 1.00m Supercut Flailhead - DD | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 1.20m Supercut Flailhead - DD | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 1.20m Multicut Flailhead - DD | —                        | —                        | —                        |
| 1.20m Multicut Flailhead - BD | —                        | —                        | —                        |
| 1.20m Tuffcut Flailhead - DD  | —                        | —                        | —                        |
| 1.20m Twincut Flailhead - DD  | —                        | —                        | —                        |
| 1.20m Omega Flailhead - DD    | —                        | —                        | —                        |
| 1.20m Omega Flailhead - BD    | —                        | —                        | —                        |
| 1.50m Multicut Flailhead - DD | —                        | —                        | —                        |
| 1.50m Multicut Flailhead - BD | —                        | —                        | —                        |
| 1.50m Twincut Flailhead - DD  | —                        | —                        | —                        |
| 1.50m Omega Flailhead - DD    | —                        | —                        | —                        |
| 1.50m Omega Flailhead - BD    | —                        | —                        | —                        |
| 1.60m Multicut Flailhead - DD | —                        | —                        | —                        |
| 1.60m Multicut Flailhead - BD | —                        | —                        | —                        |
| 1.60m Tuffcut Flailhead - DD  | —                        | —                        | —                        |
| 1.60m Omega Flailhead - DD    | —                        | —                        | —                        |
| 1.60m Omega Flailhead - BD    | —                        | —                        | —                        |
| 2.00m Multicut Flailhead - DD | —                        | —                        | —                        |
| 2.00m Multicut Flailhead - BD | —                        | —                        | —                        |
| Flailhead options             |                          |                          |                          |
| Flailhead Skid Kit            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Cushioned Grass Mowing Roller | —                        | —                        | —                        |
| Hydraulic Roller              | —                        | —                        | —                        |
| Hydraulic Front Hood          | —                        | —                        | —                        |

■ Standard Equipment ☐ Optional Equipment — Not available

## MCCORMICK 30 SERIES

Designed for the landscape, amenities and ground-care sectors, 30-series machines thrive in confined areas, parks and public grounds, and in sites with extensive street furniture.

They are also ideal for specialist contractors, local government, and small-scale farmers looking for a cost-effective hedgecutter for their own land.

- 3 Reach options from 3.4m to 4.3m
- 2 Advanced control options
- 3 Mounting options
- 1 Armset option
- 2 Floatation systems
- 10 Attachment options

