




POWER ARM  
**60 SERIES**

**PA5360** - 5.3m (17' 5") reach  
**PA5860** - 5.8m (19' 0") reach

60 SERIES		
Advanced Controls	PA5360	PA5860
Cable Control	<input type="checkbox"/>	<input type="checkbox"/>
Motion Mini	—	—
Motion	<input type="checkbox"/>	<input type="checkbox"/>
Evolution	<input type="checkbox"/>	<input type="checkbox"/>
Revolution Including Easy Drive System (EDS)	<input type="checkbox"/>	<input type="checkbox"/>
Two-way Rotor Engagement - Cable Control (CRC)	<input type="checkbox"/>	<input type="checkbox"/>
Two-way Rotor Engagement - Electric Control (ERC)*	<input type="checkbox"/>	<input type="checkbox"/>
Mounting		
Front 3-Point Mounting Including Stabiliser	<input type="checkbox"/>	—
Front DIN Plate Mounting	<input type="checkbox"/>	—
Rear 3-Point Mounting Including Stabiliser	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Rear 3-Point to 4-Point Hitch Stabiliser Kit	<input type="checkbox"/>	<input type="checkbox"/>
Rear 3-Point to 5-Point Axle Mounting Kit**	<input type="checkbox"/>	<input type="checkbox"/>
Rear 5-Point Rigid Frame, Axle Mounting Kit**	—	—
Armsets		
Straight Armset	<input type="checkbox"/>	<input type="checkbox"/>
Midcut Armset	—	—
Telescopic Armset	—	—
Variable Forward Reach Armset (VFR)	<input type="checkbox"/>	—
Telescopic-Variable Forward Reach Armset (T-VFR)	—	—
Parallel Arm Geometry	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Hydraulics		
Horsepower	60hp	60hp
System Type	Gear	Gear
Pump Type	Cast	Cast
Total Flow Rate l/min	122.0	122.0
Arm Circuit Flow Rate l/min	19.0	19.0
Attachment Circuit Flow Rate l/min	103.0	103.0
Oil Tank Capacity	180ltrs	180ltrs
Oil Cooler	<input type="checkbox"/>	<input type="checkbox"/>
Totally Independent Hydraulic System	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Hydraulic Upgrades		
Angle Float Kit	<input checked="" type="checkbox"/> (Std on Cable)	<input checked="" type="checkbox"/> (Std on Cable)
Lift Float Kit	<input type="checkbox"/>	<input type="checkbox"/>
Advanced Float Kit (only on EVOLUTION controls)	<input type="checkbox"/>	<input type="checkbox"/>
EDS (only on REVOLUTION controls)	<input type="checkbox"/>	<input type="checkbox"/>
PowerBoost (75 l/min Arm Circuit Flow Rate)	—	—
Additional Hydraulic Services	<input type="checkbox"/>	<input type="checkbox"/>
Safety Equipment		
External Debris Blower	<input type="checkbox"/>	<input type="checkbox"/>
Integrated Debris Blower	—	—
Road Lighting Kit	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Warning Arrow Kit	<input type="checkbox"/>	<input type="checkbox"/>
Window Guards	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cab Protection Kit	—	—
Safety Breakaway	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Power Slew	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cushioned Top Link	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Tractor Requirements		
Minimum Tractor Weight	3,500kg	4,000kg
Minimum Tractor Horsepower	80hp	80hp
Specification		
Machine Weight #	1015kg	1060kg
Left and Right-Hand Build Options	<input type="checkbox"/>	<input type="checkbox"/>

\* Including SoftStart    \*\* Excluding axle brackets & latches    # Depending on specification, excluding attachment & oil

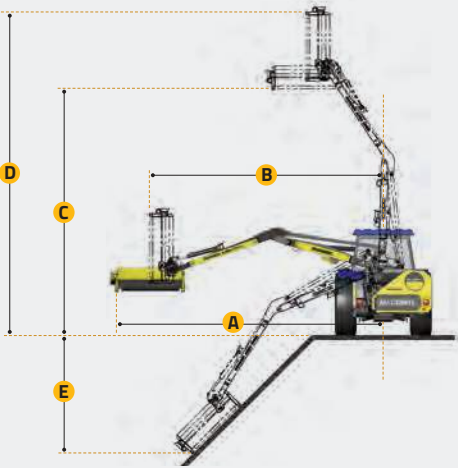

REACH DIMENSIONS

	PA5360	PA5860
A	5.3m / 17' 5"	5.8m / 19' 0"
B	4.7m / 15' 5"	5.2m / 17' 1"
C	4.8m / 15' 9"	5.2m / 17' 1"
D	6.3m / 20' 8"	6.8m / 22' 4"
E	2.5m / 8' 2"	2.7m / 8' 10"

POWER ARM FLAILHEADS

	PA5360	PA5860
1.00m Supercut Flailhead - DD	—	—
1.20m Supercut Flailhead - DD	—	—
1.20m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Tuffcut Flailhead - DD	—	—
1.20m Twincut Flailhead - DD	—	—
1.20m Omega Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Omega Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Twincut Flailhead - DD	—	—
1.50m Omega Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Omega Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.60m Multicut Flailhead - DD	—	—
1.60m Multicut Flailhead - BD	—	—
1.60m Tuffcut Flailhead - DD	—	—
1.60m Omega Flailhead - DD	—	—
1.60m Omega Flailhead - BD	—	—
2.00m Multicut Flailhead - DD	—	—
2.00m Multicut Flailhead - BD	—	—
Flailhead options		
Flailhead Skid Kit	<input type="checkbox"/>	<input type="checkbox"/>
Cushioned Grass Mowing Roller	<input type="checkbox"/>	<input type="checkbox"/>
Hydraulic Roller	<input type="checkbox"/>	<input type="checkbox"/>
Hydraulic Front Hood	—	—

☒ Standard Equipment    ☐ Optional Equipment    — Not available

**60 SERIES**

Created for large-scale farmers, contractors and local government green maintenance teams, the 60-series is tough and durable and includes such enhancements as tapered seam-welded arms for strength and lightness, a cushioned top link for comfort in transport, and an axle-mounting option.

While retaining the price of a mid-range machine, the 60-series allows access to a series of performance-enhancing features such as McConel's award winning Easy Drive System and state-of-the-art Revolution controls.

- 2 Reach options from 5.3m to 5.8m
- 4 Advanced control options
- 3 Mounting options
- 2 Armset options
- 4 Floatation services
- 22 Attachment options

