



Machine Features

- » 3.2m or 3.5m reach (1.2m or 1.5m Cutterbar options)
- » Unique Swingover – enables machine to work either side of tractor
- » Low power requirement
- » Three-point linkage-mounting system
- » Operator friendly
- » Choice of control systems
- » Front mounting option
- » Eliminates white finger

Markets

- » Horticultural/Landscape
- » Groundcare/Amenity
- » Governmental
- » Contractors

Tractor Requirements


- » 550kg minimum tractor weight
- » 15hp minimum tractor horse power

McCONNEL POWER ARMS


Tractor Requirements			
Minimum Horse Power Requirements	15hp	Minimum Tractor Weight	550kg
Machine Specification			
Maximum Reach	3.5m (11'6")	Cutterbar Motor hp	15 hp
Machine Weight with Flailhead (exc.oil)	180kg	Oil Tank Capacity	N/A
Hydraulics			
Gear Semi Independent	☐	Gear Totally Independent	☐
Piston Hydraulics	—		
Method of Attachment			
3-Point Linkage-Mounted	■	5-Point Axle Bracket-Mounted	—
Controls			
Cable	☐	Xtra Touch Control - (XTC - Mini)	☐
Switchbox	—	Xtra Touch Control (XTC)	—
Monolever	—	V4 Pro Control (EDS optional) (V4 + EDS)	—
Machine Equipment			
Parallel Arm Geometry	—	Telescopic Dipper Arm	—
Midcut Pack	—	Angle Float Kit - <i>Standard On Electric Models</i>	—
Lift Float Kit	—	Easy Drive System (EDS) - <i>V4 Pro Controls only</i>	—
Oil Cooler	—	Power Slew	—
Safety Breakaway - <i>Mechanical</i>	■	Cable Rotor Control - <i>Dual Rotation (Ti only)</i>	■
Road Lighting Kit	—	Electric Rotor Control - <i>Dual Rotation (Ti only)</i>	☐
Warning Arrow - <i>Magnetic</i>	—	Window Guards	■
Cushioned Grass Mowing Roller	—	Debris Blower	—
Front Flap Kit	—	Flailhead Skid Kit	—
Front Mounting Build	☐	Orbitor Head Kit	—
Hydraulic Roller	—	Hydraulic Quick Attach	—
Power Arm Attachments			
1.20m Swingtrim Cutter Bar	☐	1.50m Multicut Flailhead - <i>Piston BD</i>	—
1.50m Swingtrim Cutter Bar	☐	1.50m Omega Flailhead - <i>GDD or BD</i>	—
1.50m Sheartrim Cutter Bar - <i>SD</i>	—	1.50m Omega Flailhead - <i>Piston BD</i>	—
1.60m Sheartrim Cutter Bar - <i>MD</i>	—	1.60m Multicut Flailhead - <i>GDD or BD</i>	—
2.00m Sheartrim Cutter Bar - <i>MD</i>	—	1.60m Multicut Flailhead - <i>Piston BD</i>	—
1.40m Sheartrim Cutter Bar - <i>HD</i>	—	1.60m Omega Flailhead - <i>GDD or BD</i>	—
2.20m Sheartrim Cutter Bar - <i>HD</i>	—	1.60m Omega Flailhead - <i>Piston BD</i>	—
1.00m Supercut Flailhead - <i>GDD</i>	—	2.00m Multicut Flailhead - <i>GDD or BD</i>	—
1.20m Supercut Flailhead - <i>GDD</i>	—	2.00m Multicut Flailhead - <i>Piston BD</i>	—
1.20m Multicut Flailhead - <i>GDD or BD</i>	—	1.20m Rotary Head - <i>FC - 3 Rotor</i>	—
1.20m Multicut Flailhead - <i>Piston BD</i>	—	1.50m Rotary Head - <i>HD - 1 Rotor</i>	—
1.20m Omega Flailhead - <i>GDD or BD</i>	—	1.65m Kirogen Mini Lem - <i>4 Rotor</i>	—
1.20m Omega Flailhead - <i>Piston BD</i>	—	Kirogen Sawheads	—
1.50m Multicut Flailhead - <i>GDD or BD</i>	—	Ditch and Grip Cleaner	—
This Machine Is Available As A Left Or Right Hand Build			
Standard Equipment	■	Optional Equipment	☐
		Not Available	—

Control Options

The boxes that are ticked indicate the control options available for this Power Arm

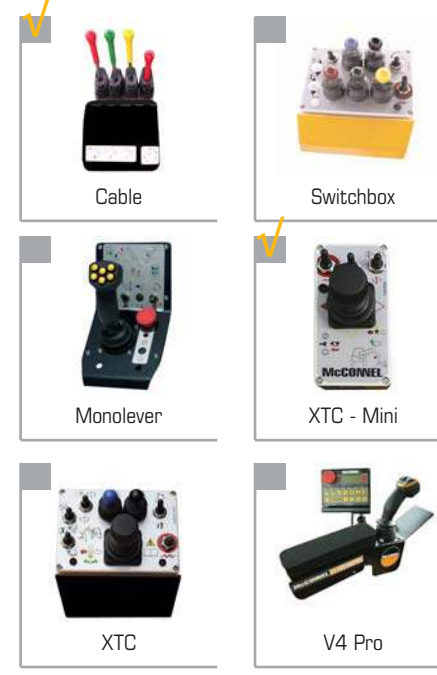

»» Choice of Controls

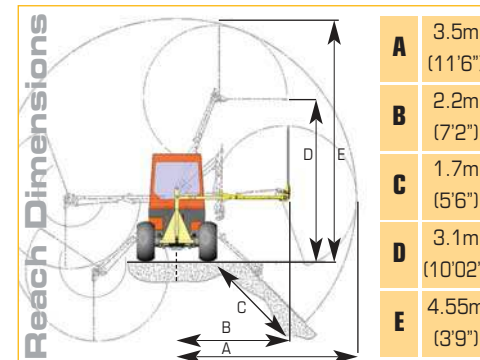

»» For illustration purposes only



»» Coniferous Hedges



»» Versatile Cuts Both-sides



»» Front Mount Option